Azimuth

CONTACTOR AND CARRIER FOR
.025 c/c x 164 LDS

8500-025-164
8000-025-164

12/03

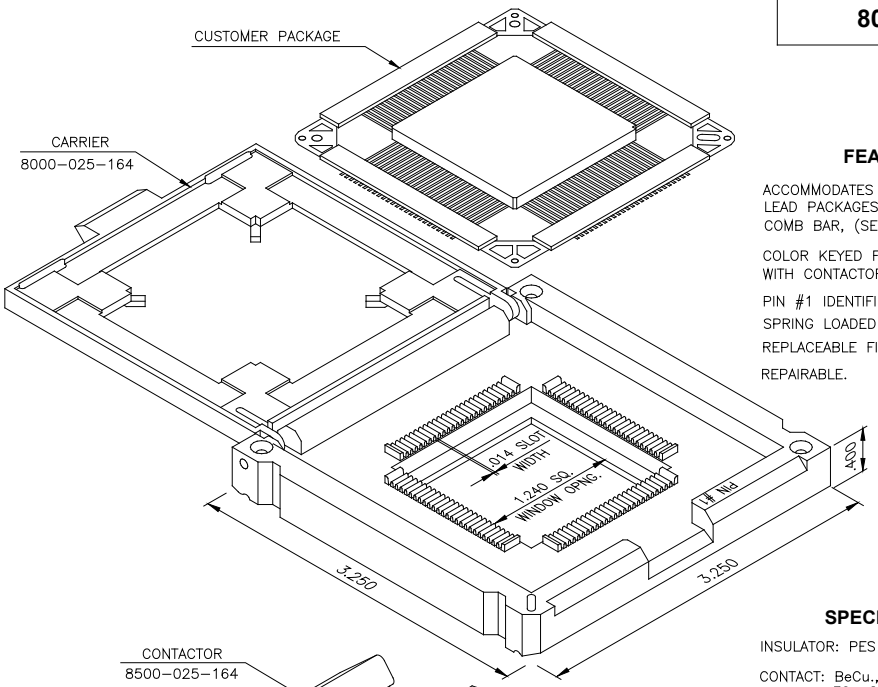

FEATURES:

ACCOMMODATES FORMED AND UNFORMED LEAD PACKAGES WITH NON–METALLIC COMB BAR, (SEE BACK).

COLOR KEYED FOR EFFICIENT INDEXING WITH CONTACTOR.

PIN #1 IDENTIFIER.

SPRING LOADED LATCHING.

REPLACEABLE FINNED INSERTS.

REPAIRABLE.

SPECIFICATIONS:

INSULATOR: PES (POLYETHERSULFONE).

CONTACT: BeCu., SPRING TEMPERED
30u GOLD OVER 30u NICKEL.

THERMAL RANGE: –55°C/+155°C.

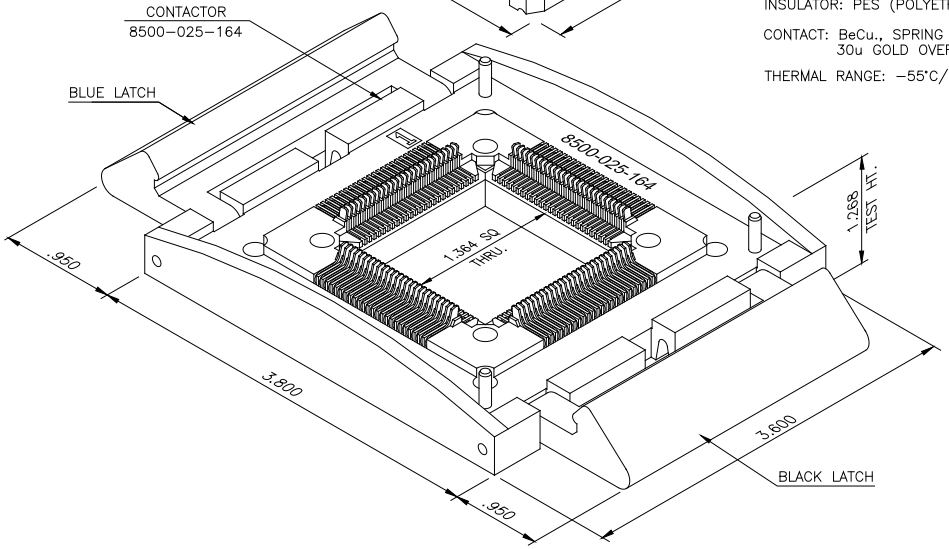

Azimuth ELECTRONICS, INC.

2605 S El Camino Real
San Clemente, CA 92672 USA

PH: 949.492.6481 FX: 949.492.0744
sales@azimuth-electronics.com
www.azimuth-electronics.com

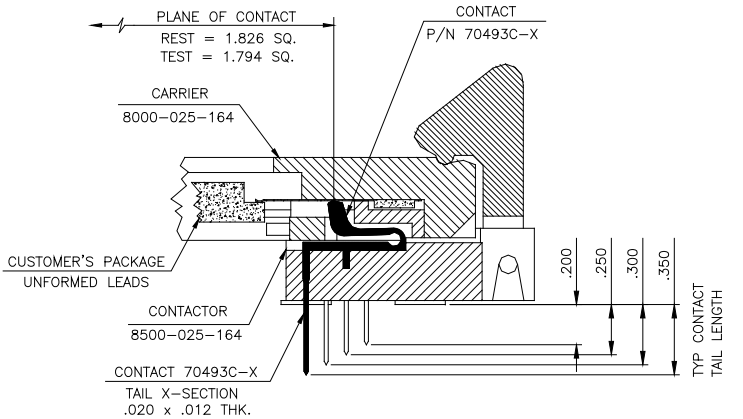

SECTION THRU CONTACT

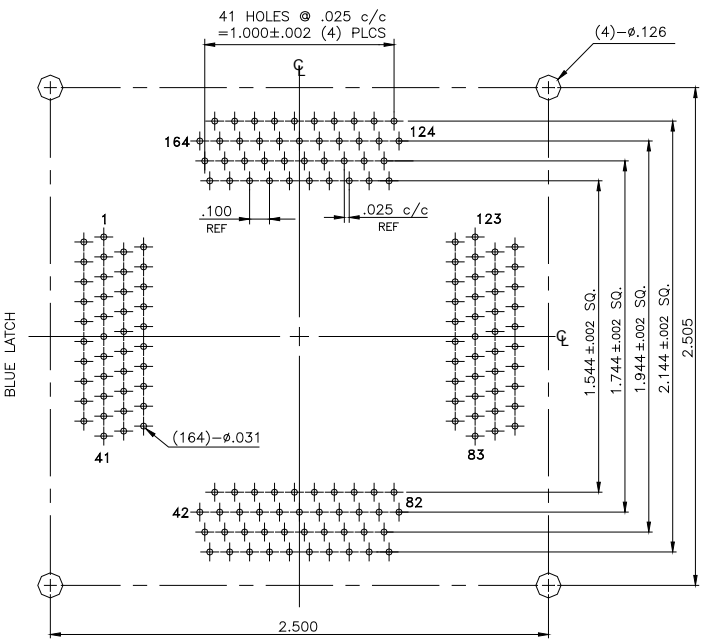

FOOTPRINT
SOCKET SIDE OF BOARD

Azimuth ELECTRONICS, INC.
2605 S El Camino Real
San Clemente, CA 92672 USA
PH:949.492.6481 FX:949492.0744
sales@azimuth-electronics.com
www.azimuth-electronics.com