Azimuth

CONTACTOR AND CARRIER FOR
.020 c/c x 304 LDS

8500-020-304-X
8000-020-304-X

11/03

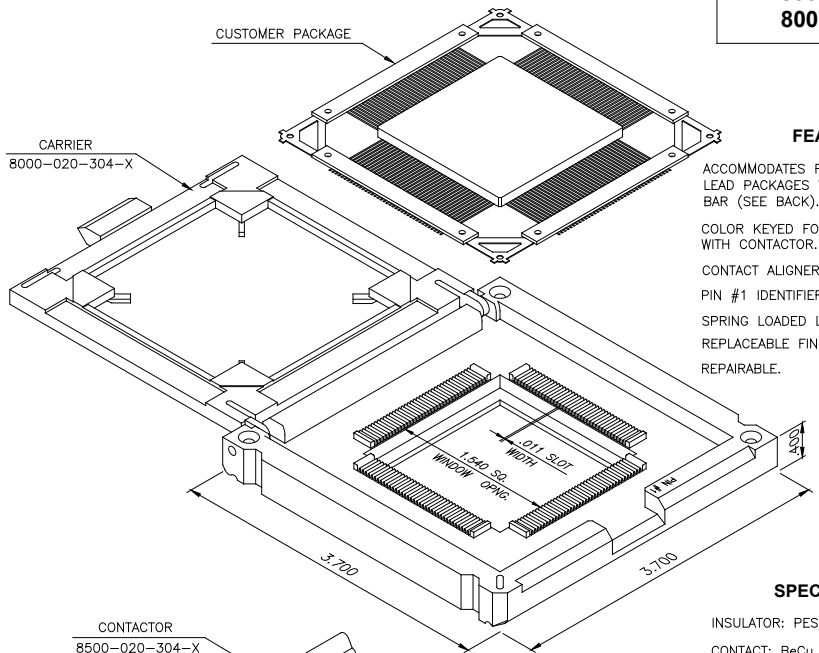

FEATURES:

ACCOMMODATES FORMED AND UNFORMED LEAD PACKAGES WITH NON-METALLIC COMB BAR (SEE BACK).

COLOR KEYED FOR EFFICIENT INDEXING WITH CONTACTOR.

CONTACT ALIGNER PLATE- SPRING LOADED.

PIN #1 IDENTIFIER.

SPRING LOADED LATCHING.

REPLACEABLE FINNED INSERT.

REPAIRABLE.

SPECIFICATIONS:

INSULATOR: PES (POLYETHERSULFONE).

CONTACT: BeCu., SPRING TEMPERED
30u GOLD OVER 30u NICKEL.

THERMAL RANGE: -55°C/+155°C.

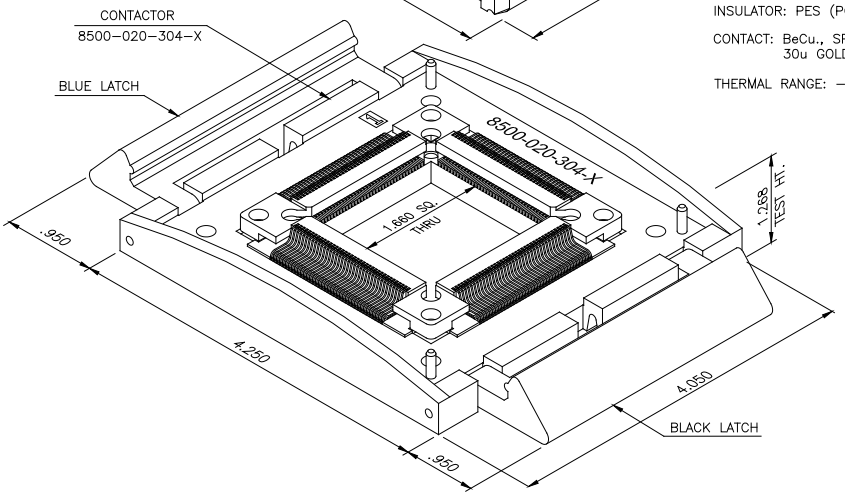

Azimuth ELECTRONICS, INC.

2605 S El Camino Real
San Clemente, CA 92672 USA

PH: 949.492.6481 FX: 949.492.0744
sales@azimuth-electronics.com
www.azimuth-electronics.com

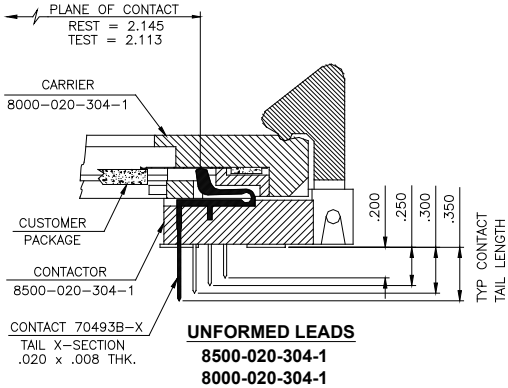

UNFORMED LEADS
8500-020-304-1
8000-020-304-1

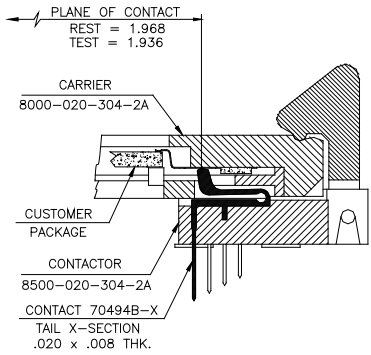

FORMED LEADS; UNCUT
8500-020-304-2A
8000-020-304-2A

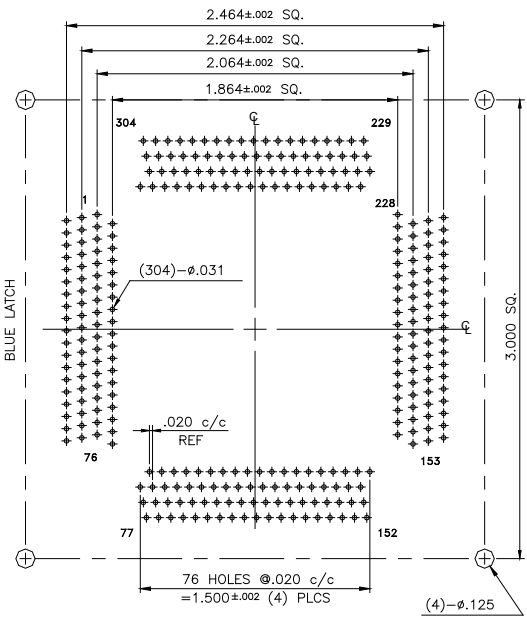

FOOTPRINT
SOCKET SIDE OF BOARD

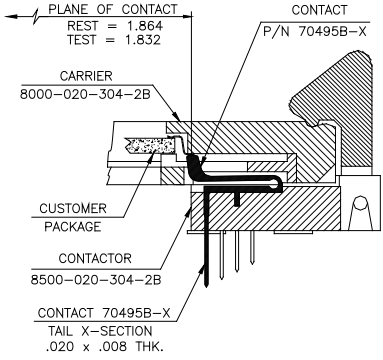

FORMED LEADS; CUT
8500-020-304-2B
8000-020-304-2B

Azimuth ELECTRONICS, INC.
2605 S El Camino Real
San Clemente, CA 92672 USA
PH:949.492.6481 FX:949492.0744
sales@azimuth-electronics.com
www.azimuth-electronics.com