

5 & 10 Watt Fixed Attenuators FH Series


High Peak Power

Model	Frequency Range	Attenuation Values *	Attenuation Accuracy	VSWR (maximum)	RF Connectors
50FH-XXX-5	DC-2000 MHz	1 thru 20 dB in any 1 dB increment	+/- 0.2 dB DC-500 MHz +/- 0.5 dB 500-1000 MHz +/- 0.8 dB 1000-2000 MHz	1.1:1 DC-500 MHz 1.2:1 500-1000 MHz 1.5:1 1000-2000 MHz	BNC, N, TNC, 7/16 or SMA
50FH-XXX-5	DC-1000 MHz	21 thru 60 dB in any 1 dB increment	+/- 0.5 dB or 2% DC-500 MHz +/- 4% 500-1000 MHz	1.2:1	BNC, N, TNC, 7/16 or SMA
50FH-XXX-10	DC-2000 MHz	1 thru 20 dB in any 1 dB increment	+/- 0.2 dB DC-500 MHz +/- 0.5 dB 500-1000 MHz +/- 0.8 dB 1000-2000 MHz	1.1:1 DC-500 MHz 1.2:1 500-1000 MHz 1.5:1 1000-2000 MHz	BNC, N, TNC, 7/16 or SMA

* (XXX) insert attenuation value



Model	Impedance	Input Power (average)	Peak Power	Operating Temperature
50FH-XXX-5	50 Ohms	5 Watts	2000 Watts	-55° C to +100° C
50FH-XXX-10	50 Ohms	10 Watts	2000 Watts	-55° C to +100° C

50FH-XXX-5

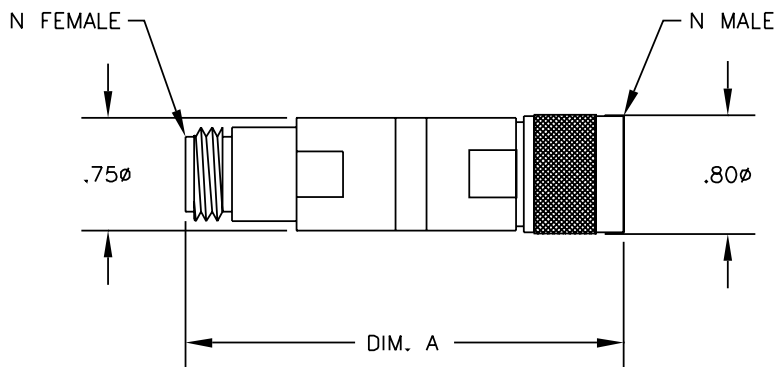

dB VALUE	DIM. A
0-30 dB	2.92
31-60 dB	4.04

50FH-XXX-10

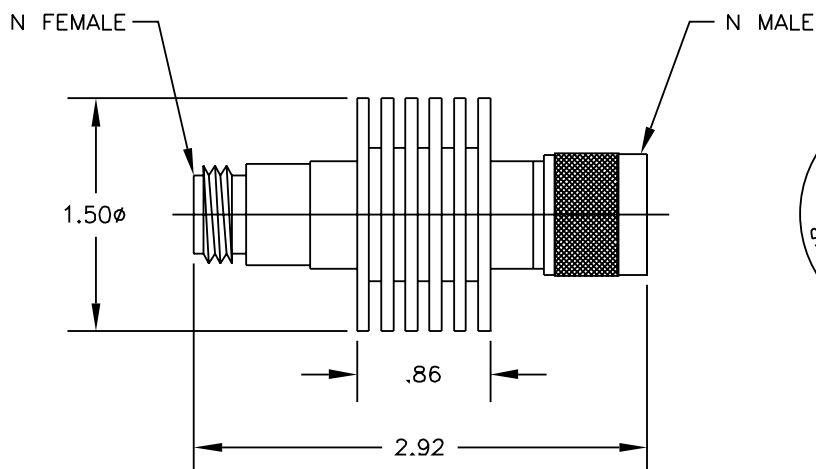

This represents only 10% of our products. For YOUR application, contact JFW at 1-877-887-4JFW or sales@jfwindustries.com